

Centrifuges and Accessories



Complete Catalogue

HERMLE
LABORTECHNIK

Table of Content

Company Profile	Page 5	CONTENT
Selection help	Page 6	
Features and Functions	Page 7	
Compact Centrifuge	Page 8	
Microlitre Centrifuges	Page 9 - 11	
Universal Centrifuges	Page 13 - 19	
High-Speed-Centrifuges	Page 20 - 21	
Filtration Centrifuge	Page 22	
HERMLE Control Panel	Page 23	



Microlitrecentrifuge Z 216 MK

Company Profile



„From the south of Germany to the whole world“

Since 1956 - for more than 50 years - HERMLE centrifuges are being sold to all parts of the world.

Once a division of Berthold Hermle AG in Gosheim, HERMLE Labortechnik GmbH in Wehingen is a company of its own since the end of 1993.

The whole production program has been entirely renewed during that time. Each unit stands for efficiency, versatility and easy handling. In the meantime our centrifuges are welcome in the fields of medicine, research and industry.

A wide range of rotors is available for the different models. All centrifuges are equipped with a microprocessor and a maintenance-free direct current motor. The refrigeration system is of course CFC-free. We and our partners are always at your assistance.



Harald Hermle
Managing Director
Head of Finance
and Controlling



Alexander Hermle
Managing Director
Head of Service



Walter Haberkorn
Managing Director
Head of Sales and
Marketing

Selection help

	Z 130 M	Z 160	Z 206 A	Z 216 M	Z 216 MK	Z 306	Z 326 Z 326 K	Z 366 Z 366 K ^a	Z 446 Z 446 K ^a	Z 513 Z 513 K	Z 32 HK	Z 36 HK
Angle rotor												
Max. RCF (xg)	2000	15994	4427	21379	21379	18624	23542	21379	24325	16580	38007	65395
								^a 24325	^a 26328			
Max. Speed 1/min	5500	14000	6000	15000	15000	14000	18000	15000	16000	12000	20000	30000
								^a 16000	^a 16000			
Swing out rotor												
Max. RCF (xg)			2938			3350	3885	3780	4807	6148	3885	2716
Max. Speed 1/min			6000			4500	5000	4500	5000	5000	5000	4500
Reaction tubes												
0,2-2,0 ml (Ø 6-11 x 38 mm)	12	18	18	44	44	30	44	24	30		44	30
5 ml (Ø 16,5 x 69 mm)				12	12							
Vacutainer												
1,8 - 5 ml (Ø 13 x 75 mm)						28	28	40	84	114	28	40
4 - 7 ml (Ø 13 x 100 mm)						28	28	40	84	114	28	40
5 ml (Ø 16 x 75 mm)						16	16	32	72	76	12	32
6 - 10 ml (Ø 16 x 100 mm)						16	16	32	72	76	12	32
Vessels/Bottles												
15 ml (Ø 17 x 120 mm), RB, RIM			12			8	8	28	68	68	8	28
15 ml (Ø 17 x 120 mm), conical			12			8	8	28	68	68	8	28
50 ml (Ø 29 x 120 mm), RB, RIM			6			4	4	12	28	32	4	12
50 ml (Ø 29 x 116 mm), conical			6			4	4	12	28	32	4	12
100 ml (Ø 44 x 100 mm), FB						4	4	4	12	12	4	4
175 ml (Ø 61 x 118 mm), conical								4	4	4		4
225 ml (Ø 61 x 137 mm), conical									4	4		
250 ml (Ø 62 x 122 mm), FB								6	4	4		6
500 ml (Ø 81 x 125 mm), FB										6		
500 ml (Ø 98 x 114 mm), FB									4			
750 ml (Ø 98 x 152 mm), FB									4	4		
1000 ml (Ø 98 x 172 mm), FB										4		
PCR-strips	4x8	2x8		4x8	4x8		4x8		4x8		4x8	
Hematocrit capillaries				24								
MTP - plates (86 x 128 x 15)						6	6	6	24	18	6	6
Page	9	*	8	10	10	13	14	16	18	*	20	21

The table shows the maximum capacity of the rotors. Of course we offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.

^aFor more information about this unit, please look into the brochure on our website: www.hermle-labortechnik.de
 FB = Flat bottom | RB = Round bottom

Features and Functions

	Z 130 M	Z 160	Z 206 A	Z 216 M	Z 216 MK	Z 306	Z 326	Z 326 K	Z 366	Z 366 K	Z 446	Z 446 K	Z 513	Z 513 K	Z 32 HK	Z 36 HK	SIEVA-2	
Brushless induction drive	■	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Microprocessor control		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Active imbalance detection and cut-off			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
One-hand closing	■	■	■			■											■	
Motor driven lid lock				■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Automatic rotor identification system with over speed protection						■	■	■	■	■	■	■	■	■	■	■	■	
Audible signal at the end of each run						■	■	■	■	■	■	■			■	■		
Emergency lid lock			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Stainless steel chamber				■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Air cooling			■	■		■	■		■		■		■					
CFC-free refrigeration system (-20° to +40°C)				■				■		■		■		■	■	■		
Displayfunctions																		
Diagnostic program			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Program memory for 99 programs				■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Quick-key for short runs		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	
Pre-cooling program				■				■		■		■		■	■	■		
Standstill cooling				■				■		■		■		■	■	■		
10 acceleration and 10 deceleration rates, possibility of unbroken deceleration			■	■	■	■	■	■	■	■	■	■	■*	■*	■	■		
Permanent indication of preset and actual values			■	■	■	■	■	■	■	■	■	■	■	■	■	■		
Pre-selection of speed or RCF in steps of 50/10-er			■	■	■	■	■	■	■	■	■	■			■	■		
Pre-selection of speed in steps of 10 or 500 Pre-selection of RCF in steps of 20 or 1000													■	■				
Pre-selection of speed in steps of 250		■															■	
Pre-selection of running time from 10 sec to 99h 59min or continuous		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Simple one handed operation			■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

* = 10 deceleration rates

Compact Centrifuge

6 x 50 ml

Z 206 A



The Z206 A accepts up to 12 x 15 ml conical and round bottom tubes. For tubes with smaller dimensions we offer several adapters. For larger volumes we offer an angle rotor for 6 x 50 ml conical and round bottom tubes.

Technical Data

max. Speed:	6000 rpm
max. RCF:	4427 xg
max. Volume:	6 x 50 ml
Speed range:	200 - 6000 rpm with 50 rpm increments / 10 rcf increments
Running time:	59 min 50 s / 10 s increments 99 h 59 min / 1 min increments
Dimensions (WxHxD):	28 x 26 x 37 cm
Weight:	12 kg

Order numbers:

306.00 V01 - Z 206 A, 230 V / 50 - 60 Hz / 100 W
306.00 V02 - Z 206 A, 120 V / 50 - 60 Hz / 100 W

Main rotor



max. Volume: 6 x 50 ml
Round bottom & Falcon
Order no. 221.55 V01



max. Volume: 12 x 15 ml
Round bottom & Falcon
Order no. 221.54 V01



For more information about the control panel, please refer to page 23

Accessories

max. Volume	max. Speed	RCF-Value	Order number	Angle
6 x 50 ml	6000 rpm	4427 xg	221.55 V01	40°
12 x 15 ml	6000 rpm	4427 xg	221.54 V01	32°
18 x 1,5/2,0 ml	6000 rpm	2938 xg	220.95 V06	45°
6 x 5,0 ml	4000 rpm	1896 xg	220.68 V04	0-90°

The table shows the maximum capacity of the rotors. Of course we also offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.

COMPACT CENTRIFUGE

Microlitre Centrifuges


Unlike traditional mini centrifuges, the Z 130 M eliminates the need to change the rotors, when switching between microtubes and PCR strips. The included, unique KOMBI-Rotor is all that is required for running 12 microtubes and 4 PCR strips simultaneously. With a fix speed that produces 5500 rpm, this centrifuge is perfect for quick spin downs.

Technical Data

max. Speed:	5500 rpm
max. RCF:	2000 xg
max. Volume:	12 x 1,5 / 2,0 ml tubes 32 x 0,2 ml PCR tubes 4 x PCR strips (8x0,2 ml)
Dimensions (WxHxD) :	14 cm x 11,2 cm x 20 cm
Weight:	1,3 kg

Order number:

324.00 V01 - Z 130 M, 230 V / 50-60 Hz / 40 W
324.00 V02 - Z 130 M, 120 V / 50-60 Hz / 40 W



KOMBI-Rotor

Z 130 M

12 x 1.5/2.0 ml



Specifications

- Unique KOMBI-Rotor for tubes and strips
- Twice the capacity of traditional mini centrifuges
- Starts and stops with closing/opening the lid
- Compact, low profile design
- Short acceleration and deceleration times
- Low noise level 52 dBA
- Manufactured according international safety regulations, e.g. IEC 61010

MICROLITRE CENTRIFUGES

Microlitre Centrifuges

44 X 2.0 ml

Z 216 M
Z 216 MK



Specifications

- Maintenance-free induction drive
- Microprocessor with large LCD Display
- Motor driven lid lock
- Active imbalance-identification and cut off
- Quick access to samples with a snap on lid
- CFC- free refrigeration system
- Lowest sample temperature 4°C at 20000 xg
- Standstill cooling
- Extremely compact
- Noise level < 60 dBA at 21380 xg
- Manufactured according to international safety regulations, i.e. IEC 61010

The Z 216 M and Z 216 MK are setting new standards in this centrifuge class. Capable of centrifuging up to 44 x 1,5 / 2,0 ml at each run. Due to their compact design and quiet running they are fitting perfectly in their working area

The powerful refrigeration system of Z 216 MK keeps samples at temperatures as low as 4°C during a continuous run at 20000xg.

Technical Data

max. Speed:	15000 rpm
max. RCF:	21379 xg
max. Volume:	44 x 1,5 ml
Speed range:	200 - 15000 rpm
Temperature range Z 216 MK:	-20°C to 40°C
Running time:	59 min 50 s / 10 s increments
	99 h 59 min / 1 min increments

Dimensions (WxHxD):

Z 216 M:	28 cm x 29 cm x 39 cm
Z 216 MK:	28 cm x 29 cm x 55 cm

Weight:

Z 216 M:	17 kg
Z 216 MK:	35 kg

Order numbers

Z 216 M:	325.00 V01 - Z 216 M, 230 V / 50 - 60 Hz / 280 W
	325.00 V02 - Z 216 M, 120 V / 50 - 60 Hz / 280 W
Z 216 MK:	305.00 V05 - Z 216 MK, 230 V / 50 - 60 Hz / 560 W
	305.00 V06 - Z 216 MK, 120 V / 50 - 60 Hz / 560 W



For more information about the control panel, please refer to page 23

MICROLITRE CENTRIFUGES

Accessories Z 216 M & Z 216 MK

* aerosol-tight

max. Volume	max. Speed	RCF-Value	Order number	Angle
44 x 1,5/2,0 ml	13500 rpm	17113/17317 xg	220.88 V08	32°/55°
30 x 1,5/2,0 ml	13500 rpm	19151 xg	221.17 V06	45°
12 x 5 ml Reaction tubes	14500 rpm	19978 xg	221.35 V03	45°
24 x 1,5/2,0 ml *	15000 rpm	21379 xg	220.87 V13	45°
24 x 1,5/2,0 ml	15000 rpm	21379 xg	220.87 V14	45°
64 x 0,5 ml	13500 rpm	14261/16298 xg	220.92 V07	40°/55°
4 x 8 - PCR-Strips	15000 rpm	15343 xg	221.38 V03	45°
24 capillaries	12000 rpm	14970 xg	220.58 V13	90°

Examples of possible rotors

Main rotor



max. Volume: 24 x 1,5/2,0 ml
Order number: 220.87 V14



max. Volume: 12 x 5 ml Reaction tubes
Order number: 221.35 V03



max. Volume: 44 x 1,5/2,0 ml
Order number: 220.88 V08



max. Volume: 24 x 1,5/2,0 ml
Order number: 220.87 V13 | aerosol-tight



max. Volume: 4 x 8 - PCR-Strips
Order number: 221.38 V03



max. Volume: 24 Hematocrit capillaries
Order number: 220.58 V13 **only Z 216 M**

The table shows the maximum capacity of the rotors. Of course we also offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.



Universal Centrifuge Z 366 K

Universal Centrifuges

The small universal laboratory centrifuge offers a wide range of applications, which covers clinical laboratory requirements, research, as well as industrial laboratory use. The Z 306 offers many accessories, including rotors for microtitreplates and high-speed fixed angle rotors for reaction vessels or centrifuge tubes up to 50 ml.

Additionally, swing out rotors, which hold a volume of 4 x 100ml can be used for tissue culture tubes and also for all common blood tubes. This wide range of accessories makes the Z 306 laboratory centrifuge indispensable in research laboratories and small clinical laboratories.

Technical Data

max. Speed: 14000 rpm
 max. RCF: 18624 xg
 max. Volume: 4 x 100 ml
 Speed range: 200 - 14000 min⁻¹
 Running time: 59 min 50 s / 10 s increments
 99 h 59 min / 1 min increments

Dimensions (WxHxD): 35 x 33 x 47 cm
 Weight: 30 kg

Order numbers:

310.00 V01 - Z 306, 230 V / 50 - 60 Hz / 240 W
 310.00 V02 - Z 306, 120 V / 50 - 60 Hz / 300 W



For more information about the control panel, please refer to page 23

Z 306

4 x 100 ml



Main rotor



max. Volume: 4 x 100 ml
 Order no. 221.12 V03



max. Volume:
 2 x 3 Microtitreplates
 Order no. 221.16 V03

Accessories

* aerosol-tight

max. Volume	max. Speed	RCF-Value	Order number	Angle
4 x 100 ml	4500 rpm	3350 xg	221.12 V03	0 - 90°
4 x 100 ml	4000 rpm	2486 xg	220.72 V06	0 - 90°
30 x 15 ml	4500 rpm	2830 xg	221.19 V02	35°
6 x 50 ml	6000 rpm	4427 xg	221.55 V02	40°
12 x 15 ml	6000 rpm	4427 xg	221.54 V02	32°
30 x 1,5/2,0 ml	12000 rpm	15131 xg	221.17 V07	45°
24 x 1,5/2,0 ml	14000 rpm	18624 xg	220.87 V16	45°
24 x 1,5/2,0 ml *	14000 rpm	18624 xg	220.87 V15	45°
2 x 3 MTP	4500 rpm	2716 xg	221.16 V03	0 - 90°

The table shows the maximum capacity of the rotors. Of course we also offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.

UNIVERSAL CENTRIFUGES

Universal Centrifuges

4 x 100 ml

Z 326
Z 326 K



Specifications

- Maintenance-free induction drive
- Microprocessor with large LCD Display
- Motor driven lid lock
- Automatic rotor identification system with overspeed protection, immediately upon rotor insertion
- Active imbalance-identification and cut off
- CFC-free refrigeration system
- A large variety of rotors and accessories
- Manufactured according to international safety regulations, i.e. IEC 61010
- Audible signal at the end of each run with several melody options
- Rotor exchange is easy to handle
- Noise level < 60 dBA (depend on rotor)
- Optimized airflow system keeps the samples cool (Z 326)

Both the table top centrifuge Z 326 and the refrigerated table top centrifuge Z 326 K offer a wide assortment of rotor options, making them ideal for a wide variety of research applications. Rotor exchange between swing out, micro, or high volume angled rotors is very simple and can take place in a matter of seconds. The Z 326 K includes the refrigeration system on the back side of the unit, optimized for the lab bench at only 40 cm wide.

Technical Data

max. Speed :	18000 rpm
max. RCF:	23542 xg
max. Volume:	4 x 100ml
Speed range:	200 - 18000 rpm
Temperature range Z 326 K:	-20°C to 40°C
Running time:	59 min 50 s / 10 s increments
	99 h 59 min / 1 min increments

Dimensions (WxHxD):

Z 326:	40 cm x 36 cm x 48 cm
Z 326 K:	40 cm x 36 cm x 70 cm

Weight:

Z 326:	43 kg
Z 326 K:	60 kg

Order numbers

Z 326:	312.00 V03 - Z 326, 230 V / 50 - 60 Hz / 455 W
	312.00 V04 - Z 326, 120 V / 50 - 60 Hz / 455 W
Z 326 K:	311.00 V05 - Z 326 K, 230 V / 50 - 60 Hz / 660 W
	311.00 V06 - Z 326 K, 120 V / 50 - 60 Hz / 660 W



For more information about the control panel, please refer to page 23

Accessories Z 326 & Z 326 K

* aerosol-tight

max. Volume	max. Speed	RCF-Value	Order number	Angle
4 x 100 ml	4500 rpm	3350 xg	221.12 V03	0 - 90°
4 x 100 ml	5000 rpm	3885 xg	220.72 V06	0 - 90°
6 x 85 ml	11000/13500 rpm	13932/20984 xg	220.78 V05	25°
6 x 85 ml	9000 rpm	10413 xg	221.18 V02	38°
4 x 85 ml	12000 rpm	14809 xg	221.20 V02	30°
30 x 15 ml	4500 rpm	2830/2467 xg	221.19 V02	35°
6 x 50 ml	6000 rpm	4427 xg	221.55 V02	40°
6 x 50 ml	12000 rpm	13522 xg	221.22 V02	26°
10 x 50 ml conical	7500 rpm	8174 xg	221.52 V02	38°
20 x 10 ml	12000 rpm	15775 xg	221.28 V02	30°
12 x 15 ml	6000 rpm	4427 xg	221.54 V02	32°
44 x 1,5/2,0 ml	13500 rpm	17113 xg	220.88 V09	32°/55°
30 x 1,5/2,0 ml	13000/14000 rpm	17758/20595 xg	221.17 V07	45°
24 x 1,5/2,0 ml	14000/15000 rpm	18624/21379 xg	220.87 V16	45°
24 x 1,5/2,0 ml *	14000/15000 rpm	18624/21379 xg	220.87 V15	45°
12 x 1,5/2,0 ml	18000 rpm	23542 xg	221.23 V02	40°
64 x 0,4 ml	13500 rpm	16298/14261 xg	220.92 V06	40°
4 x 8 - PCR-Strips	15000 rpm	15343 xg	221.38 V01	45°
2 x 3 MTP	4500 rpm	2716 xg	221.16 V03	0 - 90°

Examples of possible rotors

Main rotor



max. Volume: 4 x 100 ml
Order number: 221.12 V03



max. Volume: 4 x 100 ml
Order number: 220.72 V06



max. Volume: 24 x 1,5/2,0 ml
Order number: 220.87 V16



max. Volume: 6 x 85 ml
Order number: 221.18 V02



max. Volume: 6 x 50 ml
Order number: 221.22 V02



max. Volume: 30 x 15 ml
Order number: 221.19 V02

The table shows the maximum capacity of the rotors. Of course we also offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.

Universal Centrifuges

6 x 250 ml

Z 366
Z 366 K



Specifications

- Maintenance-free induction drive
- Microprocessor with large LCD Display
- Motor driven lid lock
- Automatic rotor identification system with over speed protection, immediately upon rotor insertion
- Active imbalance-identification and cut off
- CFC- free refrigeration system
- A large variety of rotors and accessories
- Manufactured according to international safety regulations, i.e. IEC 61010
- Audible signal at the end of each run with several melody options
- Rotor exchange is easy to handle
- Noise level < 63 dBA (depend on rotor)
- Optimized airflow system keeps the samples cool

These universal table top centrifuges Z 366 and Z 366 K putting new scales regarding the versatility, running features, easy handling and design. Both, the tube capacity of 40 x 15 ml conical tubes and centrifugal forces up to 24325 xg, turning these table top centrifuges Z 366 and Z 366 K into universal high-powered centrifuges.

Technical Data

max. speed:	15000 / 16000 rpm
max. RCF:	21379 / 24325 xg
max. Volume:	6 x 250ml
speed range:	200 - 15000 / 16000 rpm
Temperature range Z 366 K:	-20°C to 40°C
Running time:	59 min 50 s / 10 s increments 99 h 59 min / 1 min increments

Dimension (WxHxD):

Z 366:	43 cm x 36 cm x 51 cm
Z 366 K:	72 cm x 36 cm x 51 cm

Weight:

Z 366:	52 kg
Z 366 K:	77 kg

Order numbers

Z 366:	301.00 V03 - Z 366, 230 V / 50 - 60 Hz / 520 W 301.00 V04 - Z 366, 120 V / 50 - 60 Hz / 520 W
Z 366 K:	319.00 V01 - Z 366 K, 230 V / 50 - 60 Hz / 785 W 319.00 V02 - Z 366 K, 120 V / 50 - 60 Hz / 785 W



For more information about the control panel, please refer to page 23

Accessories Z 366 & Z 366 K

* aerosol-tight

max. Volume	max. Speed	RCF-Value	Order number	Angle
6 x 250 ml	8000 rpm	10016 xg	221.21 V02	28°
4 x 250 ml	4500 rpm	3780 xg	221.15 V02	0 - 90°
16 x 50 ml conical	4500 rpm	3735 xg	221.61 V01	0 - 90°
6 x 85 ml	11000/13000 rpm	15555/21726 xg	221.18 V02	38°
30 x 15 ml	4500 rpm	2830 xg	221.19 V02	35 °
4 x 85 ml	12000 rpm	14809 xg	221.20 V02	30°
6 x 50 ml	13000 rpm	15869 xg	221.22 V02	26°
20 x 10 ml	12000 rpm	15775 xg	221.28 V02	30°
44 x 1,5/2,0	15000/16000 rpm	21128/24039 xg	220.88 V09	32°/55°
24 x 1,5/2,0 ml	15000/16000 rpm	21379/24325 xg	220.87 V16	45°
24 x 1,5/2,0 ml *	15000/16000 rpm	21379/24325 xg	220.87 V15	45°
10 x 50 ml conical	9000/10500 rpm	11771/16022 xg	221.52 V02	38°
2 x 3 MTP	4500 rpm	2716 xg	221.16 V03	0 - 90°

Examples of possible rotors

Main rotor



max. Volume: 4 x 250 ml
Order number: 221.15 V02



max. Volume: 6 x 250 ml
Order number: 221.21 V02



max. Volume: 2 x 3 Microtitreplates
Order number: 221.16 V03



max. Volume: 24 x 1,5/2,0 ml
Order number: 220.87 V15 | aerosol-tight



max. Volume: 6 x 85 ml
Order number: 221.18 V02



max. Volume: 10 x 50 ml conical
Order number: 221.52 V02

The table shows the maximum capacity of the rotors. Of course we also offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.

Universal Centrifuges

4 x 750 ml

Z 446
Z 446 K



Specifications

- Maintenance free induction drive
- Microprocessor control with LCD-Display
- Motor driven lid-lock
- Automatic rotor identification system with over speed protection, immediately upon rotor insertion
- Active imbalance-identification and cut off
- A large variety of rotors and accessories
- CFC free refrigeration system
- Manufactured according international standards, e.g. IEC 61010
- Audible signal at end of the each run with several melody options
- Noise level < 65 dBA (depend on rotor)
- Easy rotor exchange
- Improved ventilation system keeps samples cool
- Stainless steel chamber

These high-volume centrifuges Z 446 and Z 446 K achieve a throughput of 68 x 15 ml conical tubes or 28 x 50 ml conical tubes at a max. RCF of 3434/4346 xg. If higher speeds are required, we also offer e.g. an angle rotor with a max. RCF of 16022 xg for 10x50 ml. The fixed-angle and swing-out rotors are suitable for almost all applications in everyday use in clinical, industrial and research laboratories.

Technical Data

max. Speed:	16000 / 16000 rpm
max. RCF:	24325/ 26328 xg
max. Volume:	4 x 750 ml
Speed range :	200 - 16000 rpm
Temperature range Z 446 K:	-20°C to 40°C
Running time:	59 min 50 s / 10 s increments 99 h 59 min / 1 min increments

Dimensions (WxHxD):

Z 446:	54 cm x 39 cm x 67 cm
Z 446 K:	73 cm x 39 cm x 67 cm

Weight:

Z 446:	79 kg
Z 446 K:	111 kg

Order numbers

Z 446:	316.00 V01 - Z 446, 230 V / 50 - 60 Hz / 640 W 316.00 V02 - Z 446, 120 V / 50 - 60 Hz / 640 W
Z 446 K:	317.00 V01 - Z 446 K, 230 V / 50 - 60 Hz / 1630 W 317.00 V02 - Z 446 K, 120 V / 50 - 60 Hz / 1630 W



For more information about the control panel, please refer to page 23

Accessories Z 446 & Z 446 K

* aerosol-tight

max. Volume	max. Speed	RCF-Value	Order number	Angle
4 x 750 ml	4000/4500 rpm	3434/4346 xg	221.36 V02	0 - 90°
4 x 500 ml	4500 rpm	4210 xg	221.08 V04	0 - 90°
4 x 500 ml	8000 rpm	10367 xg	221.51 V02	24°
6 x 250 ml	8000 rpm	10016 xg	221.21 V02	28°
4 x 250 ml	4500/5000 rpm	3894/4807 xg	220.86 V02	0 - 90°
6 x 85 ml	11000/13000 rpm	15555/21726 xg	221.18 V02	38°
10 x 50 ml conical	10000/10500 rpm	14532/16022 xg	221.52 V02	38°
4 x 85 ml	15000/16000 rpm	23140/26328 xg	221.20 V02	30°
6 x 50 ml	13000 rpm	15869 xg	221.22 V02	26°
20 x 10 ml	12000 rpm	15775 xg	221.28 V02	30°
44 x 1,5/2,0 ml	16000 rpm	24039 xg	220.88 V09	32°/55°
30 x 1,5/2,0 ml	15000 rpm	23643 xg	221.17 V07	45°
24 x 1,5/2,0 ml	16000 rpm	24328/24325 xg	220.87 V16	45°
24 x 1,5/2,0 ml *	16000 rpm	24328/24325 xg	221.87 V15	45°
2 x 3 MTP	4500 rpm	2716 xg	221.16 V03	0 - 90°
4 x 8 - PCR Strips	15000 rpm	15343 xg	221.38 V01	45°

Examples of possible rotors

Main rotor



max. Volume: 4 x 750 ml
Order number: 221.36 V02



max. Volume: 4 x 500 ml
Order number: 221.51 V02



max. Volume: 2 x 3 Microtitreplates
Order number: 221.16 V03



max. Volume: 6 x 85 ml
Order number: 221.18 V02



max. Volume: 10 x 50 ml conical
Order number: 221.52 V02



max. Volume: 24 x 1,5/2,0 ml
Order number: 221.87 V16

The table shows the maximum capacity of the rotors. Of course we also offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.

High-Speed Centrifuges

4 x 100 ml

Z 32 HK



Main rotor



max. Volume: 6 x 85 ml
Order number: 220.78 V05



max. Volume: 24 x 1.5/2,0 ml
Order number: 220.87 V15
aerosol-tight

With a wide range of accessories, the Z32HK high speed centrifuge is applicable in a wide variety of research settings. In spite of remarkably small footprint, the Z 32 HK features a powerful refrigeration system capable of maintaining cool sample temperatures even at maximum speed.

Technical Data

max. speed:	20000 rpm
max. RCF:	38007 xg
max. volume:	4 x 100 ml
Speed range:	200 - 20000 rpm
Temperature range:	-20°C to 40°C
Running time:	59 min 50 s / 10 s increments 99 h 59 min / 1 min increments
Dimensions (WxHxD):	40 x 36 x 70 cm
Weight:	71 kg

Order numbers:

311.00 V07 - Z 32 HK, 230 V / 50 - 60 Hz / 1200 W
311.00 V08 - Z 32 HK, 120 V / 50 - 60 Hz / 1200 W



For more information about the control panel, please refer to page 23

Accessories

* aerosol-tight

max. Volume	max. Speed	RCF-Value	Order number	Angle
24 x 1,5 ml *	20000 rpm	38007 xg	220.87 V15	45°
24 x 1,5/2,0 ml	17000 rpm	27460 xg	220.87 V16	45°
30 x 1,5/2,0 ml	17000 rpm	30368 xg	221.17 V07	45°
44 x 1,5/2,0 ml	13500 rpm	17113 xg	220.88 V09	32°/55°
20 x 10 ml	14000 rpm	21472 xg	221.28 V02	30°
6 x 50 ml	16000 rpm	24039 xg	221.22 V02	26°
10 x 50 ml conical	9000 rpm	11771 xg	221.52 V02	38°
4 x 85 ml	15000 rpm	23140 xg	221.20 V02	30°
30 x 15 ml	4500 rpm	2830/2467 xg	221.19 V02	35°
6 x 85 ml	13500 rpm	20984 xg	220.78 V05	25°
6 x 85 ml	13000 rpm	21726 xg	221.18 V02	38°
4 x 100 ml	4500 rpm	3350 xg	221.12 V03	0 - 90°
4 x 100 ml	5000 rpm	3885 xg	220.72 V06	0 - 90°
12 x 15 ml conical	6000 rpm	4427 xg	221.54 V02	32°
6 x 50 ml conical	6000 rpm	4427 xg	221.55 V02	40°
2 x 3 MTP	4500 rpm	2761 xg	221.16 V03	0 - 90°
4 x 8 - PCR Strips	15000 rpm	15343 xg	221.38 V01	45°

The table shows the maximum capacity of the rotors. Of course we also offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.

High-Speed Centrifuges

The Z 36 HK is the culmination of many years of centrifuge design experience combined with the latest technology. Featuring speeds up to 30000 rpm (65395 xg) with ten available rotor options, the Z 36 HK is the most capable centrifuge in its class.

Technical Data

max. speed:	30000 rpm
max. RCF:	65395 xg
max. Volume:	6 x 250 ml
Speed range:	200 - 30000 rpm
Temperature range:	-20°C to 40°C
Running time:	59 min 50 s / 10 s increments 99 h 59 min / 1 min increments
Dimensions (WxHxD):	71,5 cm x 42 cm x 51 cm
Weight:	91 kg

Order numbers:

302.00 V03 - Z 36 HK, 230 V / 50 - 60 Hz / 1600 W
302.00 V04 - Z 36 HK, 120 V / 50 - 60 Hz / 1800 W



For more information about the control panel, please refer to page 23

Z 36 HK

6 x 250 ml



Main rotor



max. Volume: 6 x 50 ml
Order number: 221.22 V01



max. Volume: 12 x 1,5/2,0 ml
Order number: 221.23 V01

Accessories

max. Volume	max. Speed	RCF-Value	Order number	Angle
6 x 250 ml	10000 rpm	15650 xg	221.21 V01	28°
4 x 250 ml	4000 rpm	2987 xg	221.15 V01	0 - 90°
6 x 85 ml	13000 rpm	21726 xg	221.18 V01	38°
30 x 15 ml	4500 rpm	2830 xg	221.19 V01	35°
4 x 85 ml	20000 rpm	41137 xg	221.20 V01	30°
6 x 50 ml	21000 rpm	41410 xg	221.22 V01	26°
10 x 50 ml conical	10500 rpm	16022 xg	221.52 V03	38°
20 x 10 ml	16000 rpm	28045 xg	221.28 V01	30°
30 x 1,5/2,0 ml	20000 rpm	42032 xg	221.17 V08	45°
12 x 1,5/2,0 ml	30000 rpm	65395 xg	221.23 V01	40°
2 x 3 MTP	4500 rpm	2716 xg	221.16 V02	0 - 90°

The table shows the maximum capacity of the rotors. Of course we also offer adapters for smaller volumes. For more information about that, please look into the brochures on our website: www.hermle-labortechnik.de. If you will not find the appropriate adapter, please contact us and we can make a special adapter for you.

HIGH-SPEED CENTRIFUGES

Filtration Centrifuge

500 ml

SIEVA - 2



Specifications

- Maintenance free induction drive
- Microprocessor controlled speed regulation
- Speed pre-selection from 250 rpm up to 10000 rpm, in increments of 250 rpm
- Running time pre-selection from 1 min to 60 min and continuous run
- Imbalance switch-off
- Manufactured according to international safety regulations i.e IEC 61010
- Automatic lid-lock
- Transparent centrifuge lid for visual control

SIEVA-2 is a filtration centrifuge with microprocessor control. By an opening in the lid it is possible to fill the centrifugal basket during rotation. The solids remain in the centrifugal basket and the liquid can run off through a opening on the right side. The transparent lid allows a visual monitoring of the centrifugation. The SIEVA-2 is very versatile and suitable for various applications.

Technical Data


max. Speed:	10000 rpm
max. RCF:	7825 xg
max. Volume:	500 ml
Speed range:	250 - 10000 rpm
Running time:	1min - 60min / 1 min increments continuous run

Dimensions (WxHxD):	39 cm x 37 cm x 49 cm
Weight:	25 kg

Order numbers:

288.00 V01 - Sieva 2, 230 V / 50 - 60 Hz
288.00 V02 - Sieva 2, 120 V / 50 - 60 Hz

Accessories



Perforated
Centrifugal basket 500 ml
Order number: 221.07 V02




Non-perforated
Centrifugal basket 500 ml
Order number: 221.07 V04







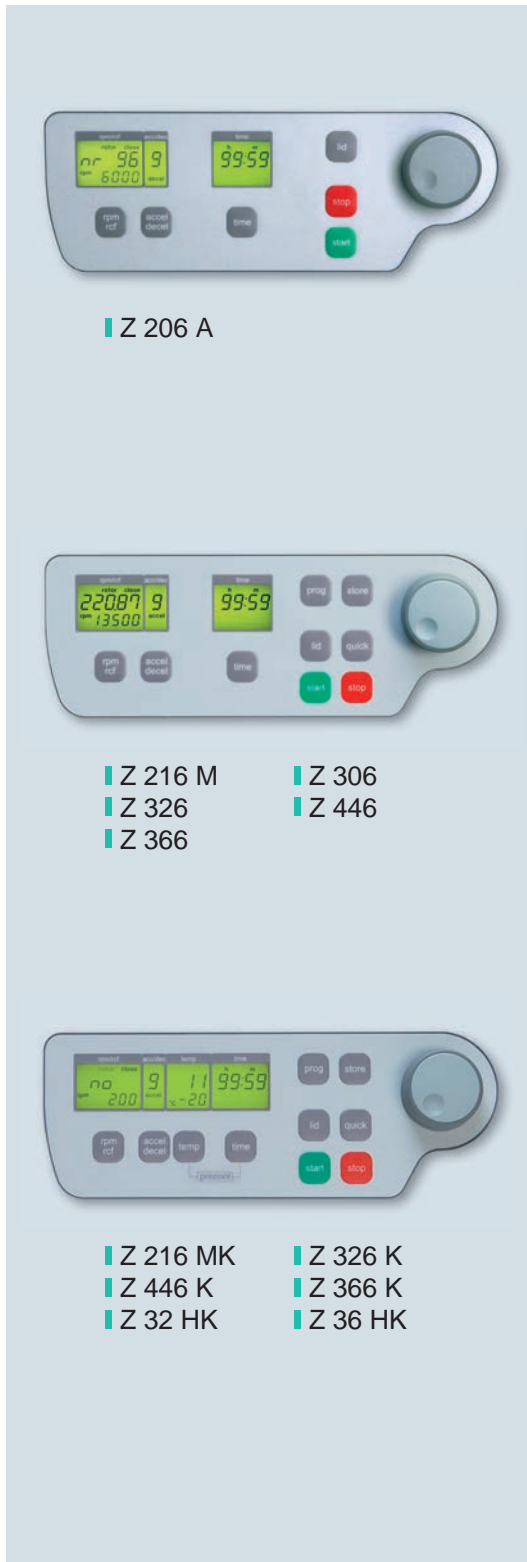





HERMLE Control Panel

The HERMLE control panel is adapted to the needs of a laboratory. It is equipped with a splash proof digital display, which is also easy to program with gloves on. With the corresponding function-key you can do the selection of the parameters and by turning the adjusting knob you can set the desired values. The distinct control panel indicates permanent preset and actual values and gives information for operating. Through the integrated diagnostic program it is possible to call up errors, number of starts or operating hours of the centrifuge.

Control Panel for: Key- and Displayfunction



Keyboard


-  = Starts centrifugation
-  = Stops centrifugation
-  = Opens the lid after standstill of the rotor
-  = Selection of the running time
-  = Call up stored programmes
There are 99 program memory available
-  = Storage of up to 99 runs including rotor type
-  = Quick key for short runs
-  = Selection of 10 acceleration and 10 deceleration rates. Possibility of unbroken deceleration
-  = Selection of speed in both rpm and g-force, with increments of 10
-  = Selection of temperature from - 20°C to 40°C (only refrigerated units)
-  = For precooling of the centrifuge and rotor
-  = Adjusting knob

Display

- rpm/rcf = Permanent indication of preset and actual rpm/rcf value
- acc/dec = Indication of acceleration and deceleration level
- temp = Indication of temperature at refrigerated units
- time = Indication of running time

HERMLE

separate the best

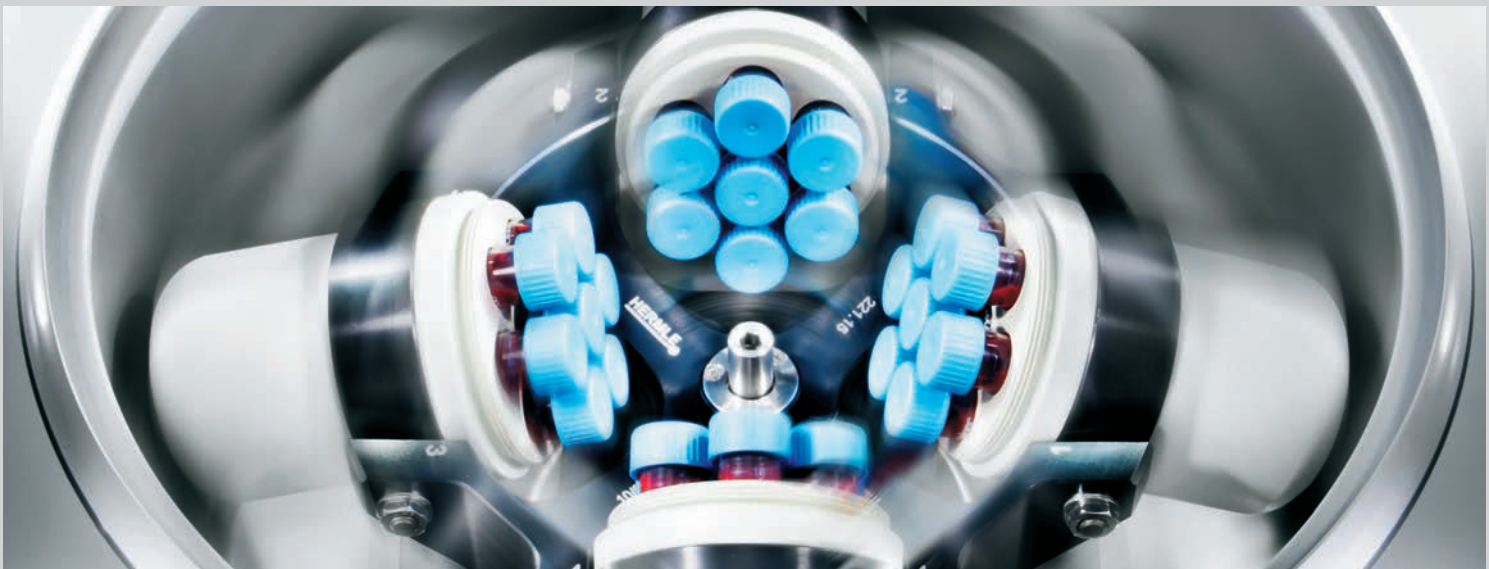

HERMLE Labortechnik GmbH

Siemensstr. 25 | 78564 Wehingen, DE

E-Mail: vertrieb@hermleLT.de

Visit us at: www.hermle-labortechnik.de

Telephone: + 49 74 26 / 96 22 - 0

HERMLE

LABORTECHNIK

Telefax: + 49 74 26 / 96 22 - 49