


# BENCHTOP CO<sub>2</sub> INCUBATOR

THE OASIS™ 6400 SERIES



# USER CONVENIENCES

THE SAFEST AND MOST SECURE ENVIRONMENT FOR YOUR RESEARCH

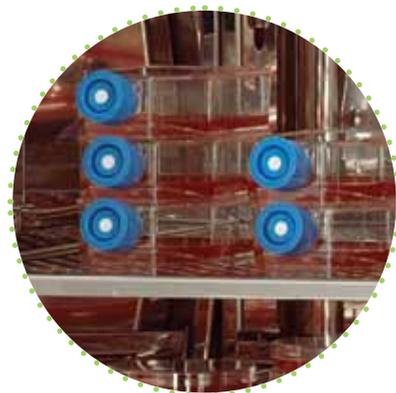

Your cell cultures are safe and sound, regardless of frequent door openings. The Oasis™ incorporates proven technologies and a sleek, customer-friendly design.

Caron's Oasis™ CO<sub>2</sub> incubator is designed to protect and advance your life's research and work.

The carefully engineered interior components are designed to maintain high relative humidity and precisely controlled temperature and CO<sub>2</sub>. This environment will not only keep cultures secure, but create conditions so your samples flourish.

This benchtop incubator keeps your cell and tissue cultures safe and sound. It is designed with your convenience in mind by including many features to make operating the incubator a pleasurable experience.

**Advanced technology and a secure environment.** The Oasis™ is engineered with components to provide exceptional conditions for the most reliable results in cell and tissue culture studies.

Precision-engineered direct heat and IR sensor technology provides stable temperature and precision CO<sub>2</sub> control.

**Compact, sleek design.** The 6 cu. ft. design takes up minimal space and is stackable so you can optimize your laboratory space. Each incubator comes with its own stacking kit for your setup convenience.


**Rapid overnight decontamination cycle.** Decontamination has never been so simple than with the push of a button. Caron's rapid, overnight 90°C moist heat decontamination cycle is maintenance-free.

**Ergonomic, intuitive user interface.** Incubator setup is simple and the large alpha/numeric display allows for at-a-glance monitoring.

# FEATURES & BENEFITS

## AT A GLANCE STANDARD FEATURES

- The Oasis™ is 6 cu. ft., compact and stackable, allowing you to attain the best use of the incubator's interior and your laboratory space.
- Caron's Oasis™ comes standard with a drift resistant, highly-reliable Infrared (IR) Sensor, allowing for quick recovery after the door is opened.
- The interior is comprised of polished stainless steel with coved corners, which is highly resistant to corrosion and allows for an easy and effective cabinet wipe-down when needed.
- The adjustable shelves are readily configured to meet your application's need and slide out, making samples at the back of the chamber easy to access.
- Our "tool-less" interior design allows you to remove the interior components for routine cleaning or to setup multiple types of cell research.
- The rapid Decontamination Cycle cleans the incubator overnight with the push of a button and minimizes downtime.
- Multiple HEPA filter design continuously protects the incubator from contamination.
- The Oasis™ has a tri-zone method for temperature control, utilizing individual heaters, which are located on the outside of every interior wall, to ensure highly uniform temperature that blankets the inside of the incubator. Temperature is rapidly recovered after each door opening.
- Caron's carefully designed airflow system maximizes airflow and results in rapid temperature and humidity recovery with optimal uniformity.
- Our ergonomic, intuitive user interface has a built in message center. It allows for effortless setup, at-a-glance monitoring from across the room and simple adjustments to setpoints and calibrations.
- Advanced data logging system records time stamped incubator parameters for on screen viewing. Built-in help feature allows easy access to frequently asked questions.
- Self diagnostic alarm system monitors all functions and controlled parameters and prompts the user in the event that any parameter exceeds programmable limits.
- A wide range of popular accessories are available which allow you to customize your unit for your application.

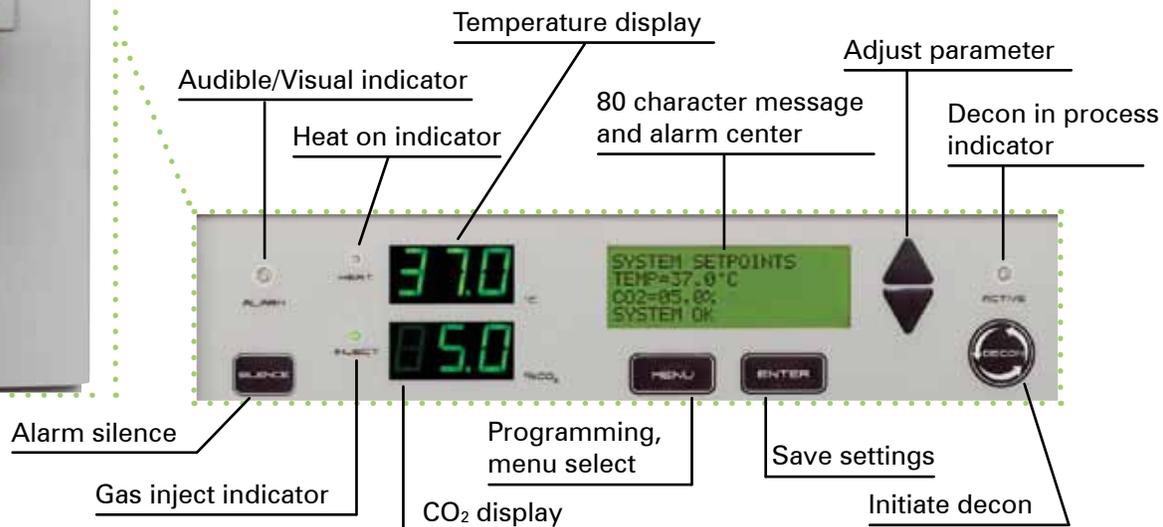

# INFRARED SENSOR


A TIME-TESTED TECHNOLOGY TO PROVIDE PRECISE CO<sub>2</sub> CONTROL



Units are shown stacked with optional roller base.

## COMPARISON OF CARON'S IR SENSOR VS. CONVENTIONAL TC SENSORS

	Caron's IR Sensor	TC Sensor
<b>Accuracy</b>	The sensor is not affected by temperature or humidity; it solely reads CO <sub>2</sub> levels.	Temperature and humidity influence the CO <sub>2</sub> reading; measures the thermal conductivity of air, not CO <sub>2</sub> alone.
<b>Recovery</b>	CO <sub>2</sub> recovers in less than five minutes after a 30 second door opening.	CO <sub>2</sub> cannot recover until both temperature and humidity stabilize; the average CO <sub>2</sub> recovery is 30 minutes.
<b>Reliability</b>	Gives precise readings of CO <sub>2</sub> levels at all times because the sensor is only measuring CO <sub>2</sub> .	The CO <sub>2</sub> display gives false readings until temperature, humidity and CO <sub>2</sub> are completely stable.
<b>Convenience</b>	You can change CO <sub>2</sub> , temperature and humidity settings without having to re-calibrate the IR Sensor.	Sensor calibration is required each time you change any of the settings; weekly calibration is typical with these sensors.

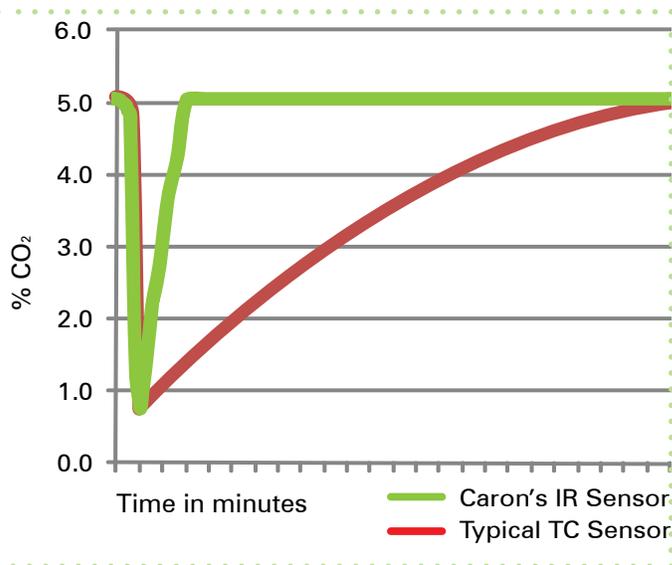

Typical CO<sub>2</sub> response to a thirty second door opening

- Oasis™ utilizes a single beam, dual-wavelength Infrared (IR) CO<sub>2</sub> Sensor to get the most accurate measurement of CO<sub>2</sub> in the incubator.
- It is the leading, proven technology in the field of CO<sub>2</sub> measurements.
- The IR Sensor offers unmatched precise control and stability over wide temperature and relative humidity ranges.
- The IR Sensor is silicon based, which contributes to durability and a long life because water vapor, dust and most chemicals do not affect the sensor's measurements.
- IR Sensors withstand harsh environments that are inherent in demanding applications.
- IR technology is ultra stable, regardless of door openings, and quickly recovers CO<sub>2</sub> to the setpoint once the door is closed.


# “DECON” CYCLE

A LOOK AT CARON'S RAPID, OVERNIGHT DECONTAMINATION CYCLE



All polished stainless steel, covered corners, a tool-less removable interior with sliding shelves and an automatic blower system that shuts off during door openings contribute to the safest environment for your cell and tissue culture samples.

By simply pressing “Decon” on the control panel, the incubator rapidly cleans the unit overnight. Messy incubator wipe down is eliminated.

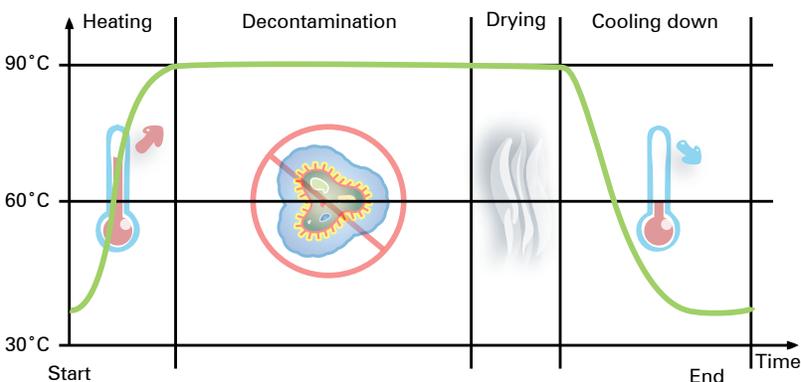

Caron's new decon drying system pumps in HEPA filtered dry air. Messy cabinet wipe down is eliminated, allowing the decon cycle to begin with a push of a button and end overnight to safely decontaminate surfaces.

## Safe cell and tissue cultures

The Oasis™ design incorporates the latest technologies to prevent contamination and to keep your cell cultures safer than ever.

The entire interior of the incubator is constructed of high grade polished stainless steel with covered corners. All of the interior metalwork components are easily removed without the use of tools. The unique “tool-less” removable interior allows for simplified routine incubator cleaning.

The exterior of the incubator is made of cold rolled steel and powder coated with ISOCIDE antimicrobial powder paint. This additional layer further protects the incubator against contamination.

During routine door openings, the blower system automatically shuts off, minimizing the amount of air exchanged with the outside environment. CO<sub>2</sub> gas inlets are protected with HEPA filters to ensure a pure gas supply.

## Decontamination cycle

While every precaution is taken to avoid susceptibility to contamination, an easy to use, maintenance free decontamination cycle is available for added peace of mind.

The Oasis™ utilizes a time-tested, effective method of decontamination. Caron's 90°C moist heat decon cycle is a scientifically proven method for safe and effective decontamination. Unlike dry heat decontamination cycles, extreme temperatures are not required to decontaminate.

Our design further simplifies and accelerates conventional moist heat cycles by adding a drying phase, making it the fastest 90°C moist heat decontamination cycle on the market.

This new feature occurs at the end of the decon cycle and pumps HEPA filtered air into the incubator. The result is a sterile, dry incubator with no clean up required! The drying cycle quickly cools the incubator as the last phase of the maintenance free, overnight decon cycle.

# SPECIFICATIONS & OPTIONAL ACCESSORIES



Units are stackable, doubling interior volume without additional floorspace. A stacking kit comes standard with every individual incubator.



The optional roller base enables effortless transportation of the unit and securely locks into place.

Model	6400-1	6400-4
Temperature Range	5°C above ambient to 60°C	
Temperature Control	±0.1°C at 37°C	
Temperature Uniformity	±0.3°C at 37°C	
Temperature Sensor	Precision Thermistor	
Humidity Range	Elevated up to 95% @ 37°C	
CO <sub>2</sub> Range	0-20% CO <sub>2</sub>	
CO <sub>2</sub> Control	±0.1% CO <sub>2</sub>	
CO <sub>2</sub> Sensor	Infrared CO <sub>2</sub> Sensor	
Interior Dimensions	20"W x 21"D x 25"H (50.8 cm x 53.3 cm x 63.5 cm)	
Interior Construction	Polished Stainless Steel	
Exterior Dimensions	36"W x 26"D* x 26"H (91.4 cm x 66 cm x 66 cm)	
Exterior Construction	Powder Coated Cold Rolled Steel	
Work Space	6 cu. ft. (170 liters)	
# of Shelves	4 Standard; 13 Maximum	
Shelf Construction	Perforated Stainless Steel	
Shelf Dimensions	18.5" x 18.3" (47 cm x 46.5 cm)	
Electrical	115V, 15A, 60 Hz	230V, 8A, 50/60 Hz
Shipping Weight	264 lbs. (120 kg.)	
Specifications are subject to change without notice. *Add 2.75" for handle.		



- DOOR401 Independent sealed inner door kit replaces standard inner door. Provides multiple small glass doors to minimize chamber interruptions during door openings. Factory installed.
- DOOR402 Factory reversed door for left hand door swing of outer door.
- FLST401 Stainless steel floor stand provides elevation to single or stacked incubators. Field installed.
- GASG401 CO<sub>2</sub> gas monitoring system automatically switches to a backup supply when low pressure is detected on the primary supply. Factory installed.
- HUMD401 Adds humidity display readable in 1% RH increments with programmable low RH alarm. Factory installed.
- OUTP401 Provides 4-20mA or 0-5V outputs that represent the temperature, humidity (if equipped) and CO<sub>2</sub> displays. Factory installed.
- RLBS401 Roller base provides swivel casters for added mobility to single or stacked incubators. Field installed.
- SHLF401 Additional stainless steel perforated shelf with shelf tracks. Field installed.
- SHLF402 Inner door shelving kit for use with DOOR401. Provides multiple mini shelf kits with three shelves each that can be accessed through the individual doors of the inner door kit.

For additional accessories, please visit [www.caronproducts.com](http://www.caronproducts.com).

PO Box 715 • Marietta, OH 45750  
 Phone: 800-648-3042 • 740-373-6809  
 Fax: 740-374-3760  
[www.caronproducts.com](http://www.caronproducts.com)  
[sales@caronproducts.com](mailto:sales@caronproducts.com)

**CARON**  
 Opening Doors for Scientists